
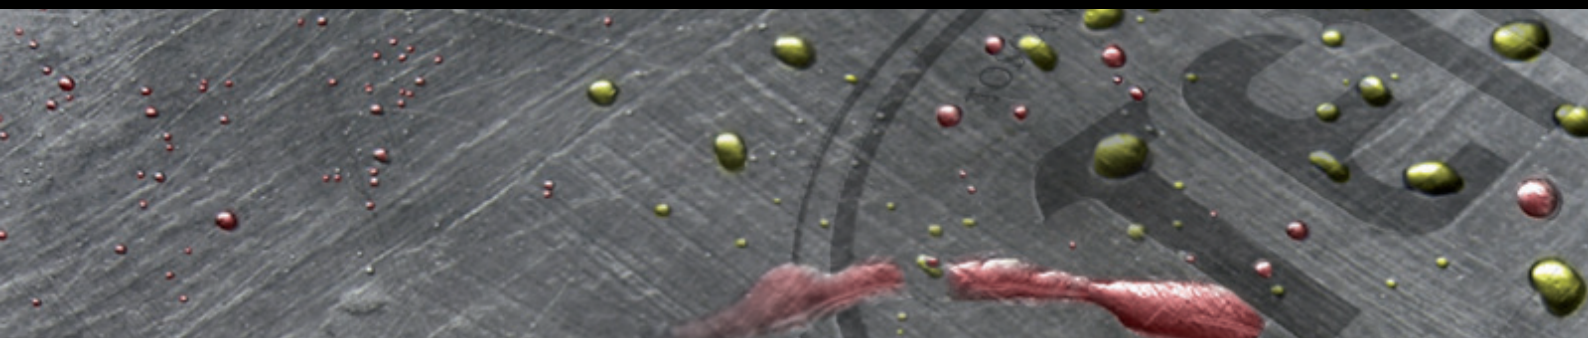


VASCETTA CP.1

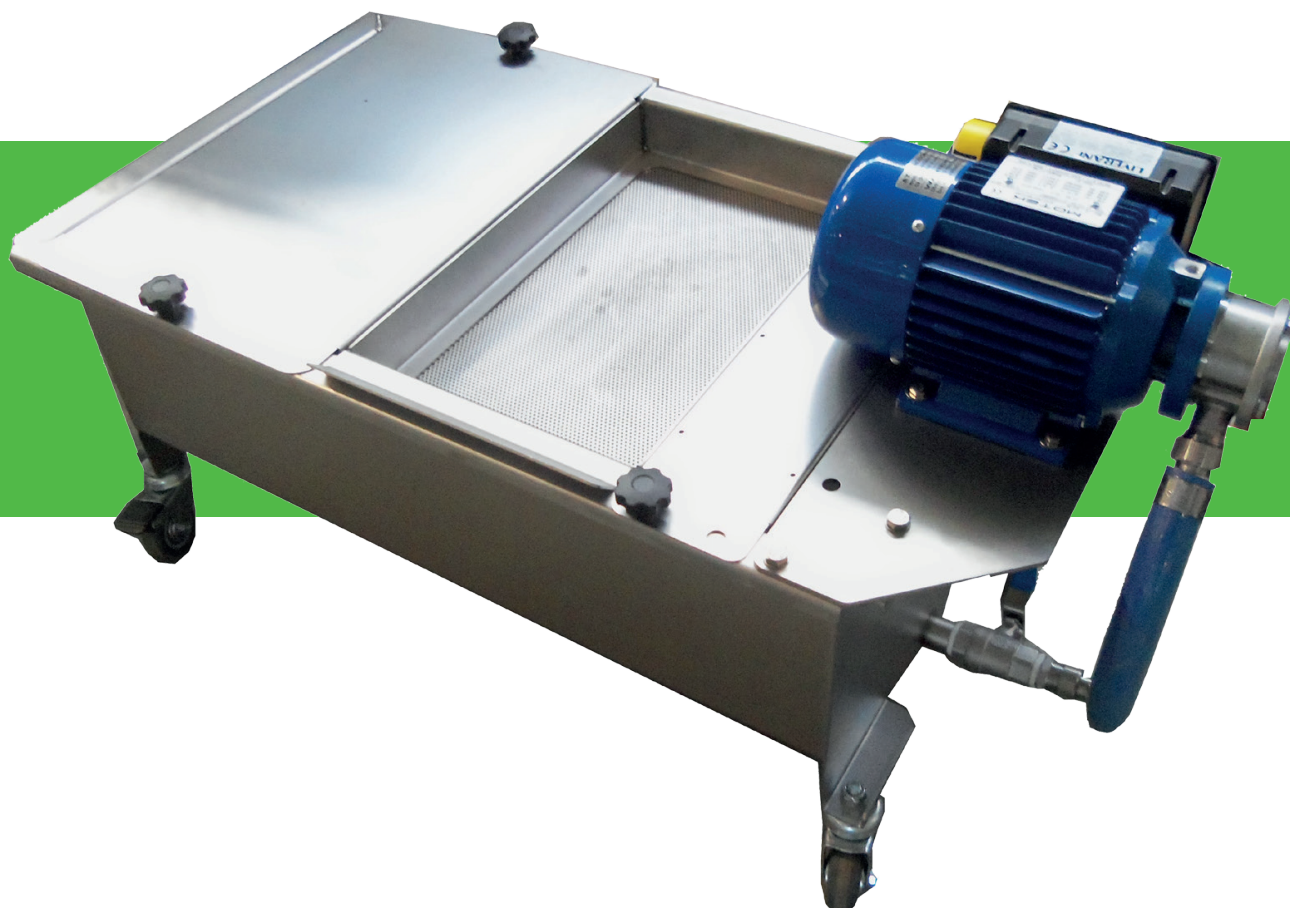

VASCHETTA CP.1

ITALIANO

Le vaschette di ricevimento olio sono costruite interamente in acciaio inox AISI 304 e sono state progettate per ricevere l'olio dal decanter.

Una apposita pompa a girante in gomma effettua lo svuotamento trasferendo il prodotto al serbatoio di stoccaggio.

Le vaschette CP possono essere dotate di pompa mono con inverter (optional) per il trasferimento dell'olio al separatore centrifugo.

ENGLISH

The oil collection vat, completely made of stainless steel AISI 304, is designed to receive the oil extracted from the decanter.

A specific pump with rubber impeller drains the vat and transfers the product towards the storage tanks.

The CP vats can be equipped, as optional, with a mono pump with inverter to transfer the oil to the centrifugal separator.

CARATTERISTICHE TECNICHE
TECHNICAL FEATURES

VASCHETTA CP.1

Potenza assorbita (Kw) 0,37

Power requirements (Kw)

Adatta all'impianto OLIO: 200-700

Suitable for OLIO plants:

ΑΦΟΙ ΓΑΒΡΙΗΛΙΔΗ Α.Ε.Β.Ε.

Σταδίου 101, Τ.Κ. 59100 Βέροια

Τηλ. 23310 20262 Fax 23310 20263

<http://www.agroenos.com>

